
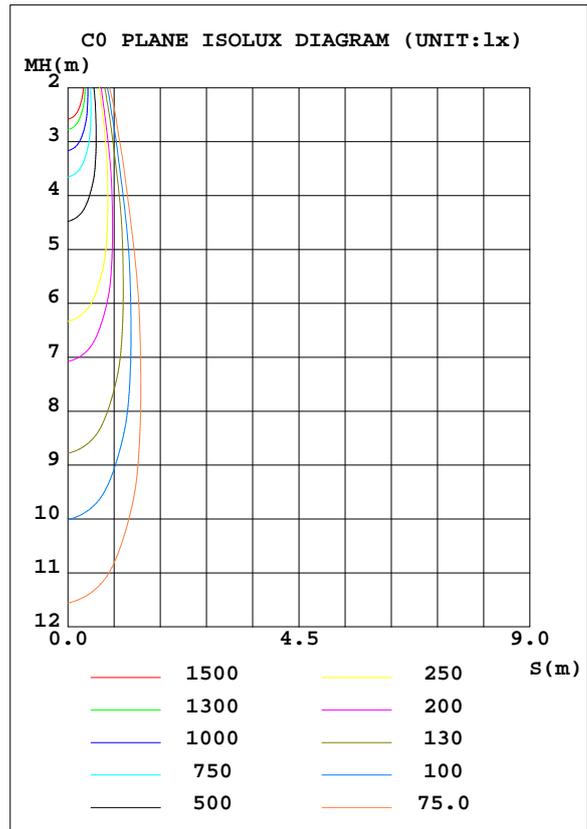


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.76 lm/W			
MODEL	TX-H1825SW14A	I _{max} (cd)	10179	S/MH(C0/180)	0.31
NOMINAL POWER(W)	28.9867	LOR(%)	100.0	S/MH(C90/270)	0.32
RATED VOLTAGE(V)	220.769	TOTAL FLUX(lm)	1378.2	η UP, DN(C0-180)	1.2,51.1
NOMINAL FLUX(lm)	1378.17	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,46.5
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220.769	η down(%)	97.5	CIBSE SHR MAX	1.00

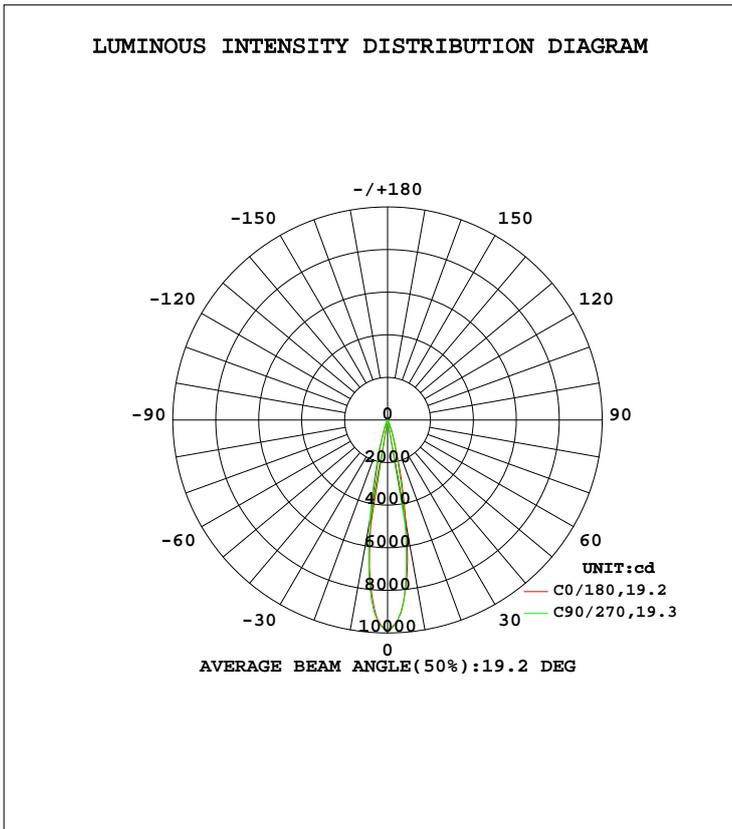

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	ℓlum,lamp
10	497.4	402.6	451.8	582.2	423.3	574.3	474.6	360.0	0- 10	688.6	688.6	50,50
20	59.48	47.37	50.57	65.13	44.27	69.28	54.08	39.39	10- 20	500.1	1189	86.3,86.3
30	8.495	7.269	8.214	10.06	7.722	10.32	8.882	6.684	20- 30	102.5	1291	93.7,93.7
40	1.953	1.852	2.072	2.392	1.949	2.270	2.057	1.714	30- 40	26.47	1318	95.6,95.6
50	1.201	1.207	1.233	1.248	1.186	1.218	1.236	1.179	40- 50	11.47	1329	96.4,96.4
60	0.7635	0.7352	0.7852	0.8291	0.7552	0.8620	0.8125	0.7050	50- 60	9.184	1338	97.1,97.1
70	0.1864	0.1434	0.1867	0.2483	0.1686	0.2119	0.1701	0.1108	60- 70	5.038	1343	97.5,97.5
80	0.0363	0.0327	0.0371	0.0406	0.0271	0.0296	0.0273	0.0234	70- 80	0.7147	1344	97.5,97.5
90	0.0267	0.0268	0.0289	0.0279	0.0263	0.0240	0.0269	0.0261	80- 90	0.2918	1344	97.5,97.5
100	0.0330	0.0340	0.0344	0.0323	0.0352	0.0334	0.0369	0.0359	90-100	0.3286	1345	97.6,97.6
110	0.0401	0.0417	0.0415	0.0394	0.0410	0.0402	0.0426	0.0421	100-110	0.3972	1345	97.6,97.6
120	0.0642	0.0775	0.0712	0.0603	0.0639	0.0580	0.0624	0.0689	110-120	0.4891	1346	97.6,97.6
130	0.2539	0.3452	0.3016	0.2280	0.2756	0.2224	0.2486	0.3090	120-130	1.211	1347	97.7,97.7
140	1.065	1.234	1.138	0.9809	1.090	0.9550	1.044	1.193	130-140	4.795	1352	98.1,98.1
150	1.929	2.018	1.996	1.924	1.963	1.883	1.946	2.025	140-150	9.730	1361	98.8,98.8
160	2.165	2.151	2.240	2.229	2.230	2.218	2.239	2.157	150-160	9.847	1371	99.5,99.5
170	1.555	1.477	1.682	1.799	1.667	1.724	1.656	1.403	160-170	5.733	1377	99.9,99.9
180	0.9803	1.013	1.002	1.015	0.9840	1.011	1.001	1.017	170-180	1.268	1378	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

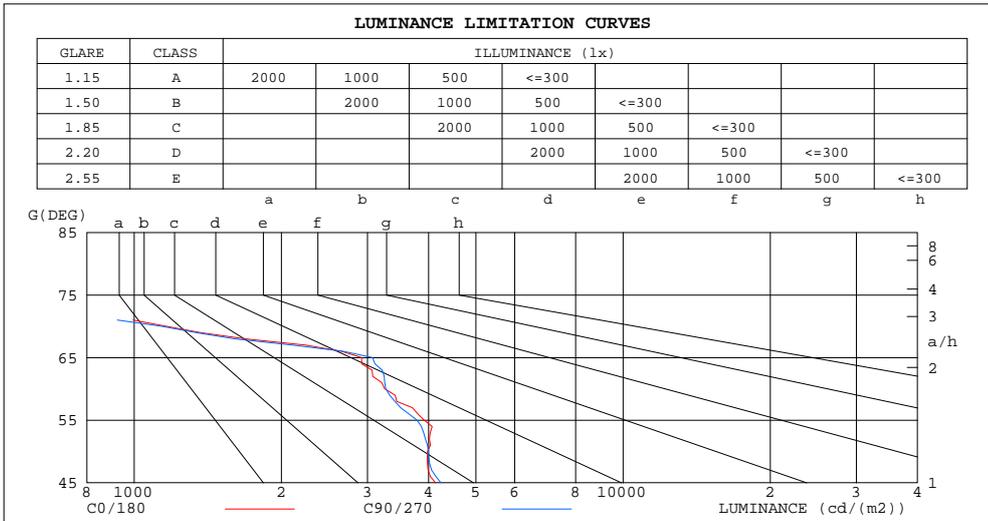

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	717	749
80	445	445
75	401	406
70	1162	1137
65	2918	3072
60	3254	3272
55	3918	3788
50	3981	3995
45	4132	4243


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	.98	.97	.97	.95
2.0	1.08	1.05	1.03	1.06	1.04	1.01	1.03	1.01	.99	.99	.98	.96	.96	.95	.94	.93
3.0	1.04	1.01	.98	1.02	.99	.97	.00	.97	.95	.97	.95	.93	.95	.93	.92	.90
4.0	1.00	.97	.94	.99	.96	.93	.97	.94	.92	.95	.93	.91	.93	.91	.90	.88
5.0	.97	.94	.91	.96	.93	.90	.94	.92	.89	.93	.90	.88	.91	.89	.88	.86
6.0	.95	.91	.88	.94	.90	.88	.92	.89	.87	.91	.88	.86	.90	.87	.86	.85
7.0	.92	.88	.86	.91	.88	.86	.90	.87	.85	.89	.86	.84	.88	.86	.84	.83
8.0	.90	.86	.84	.89	.86	.84	.88	.85	.83	.87	.85	.83	.86	.84	.82	.81
9.0	.88	.84	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.85	.83	.81	.80
10.0	.86	.83	.80	.86	.82	.80	.85	.82	.80	.84	.82	.80	.83	.81	.79	.79

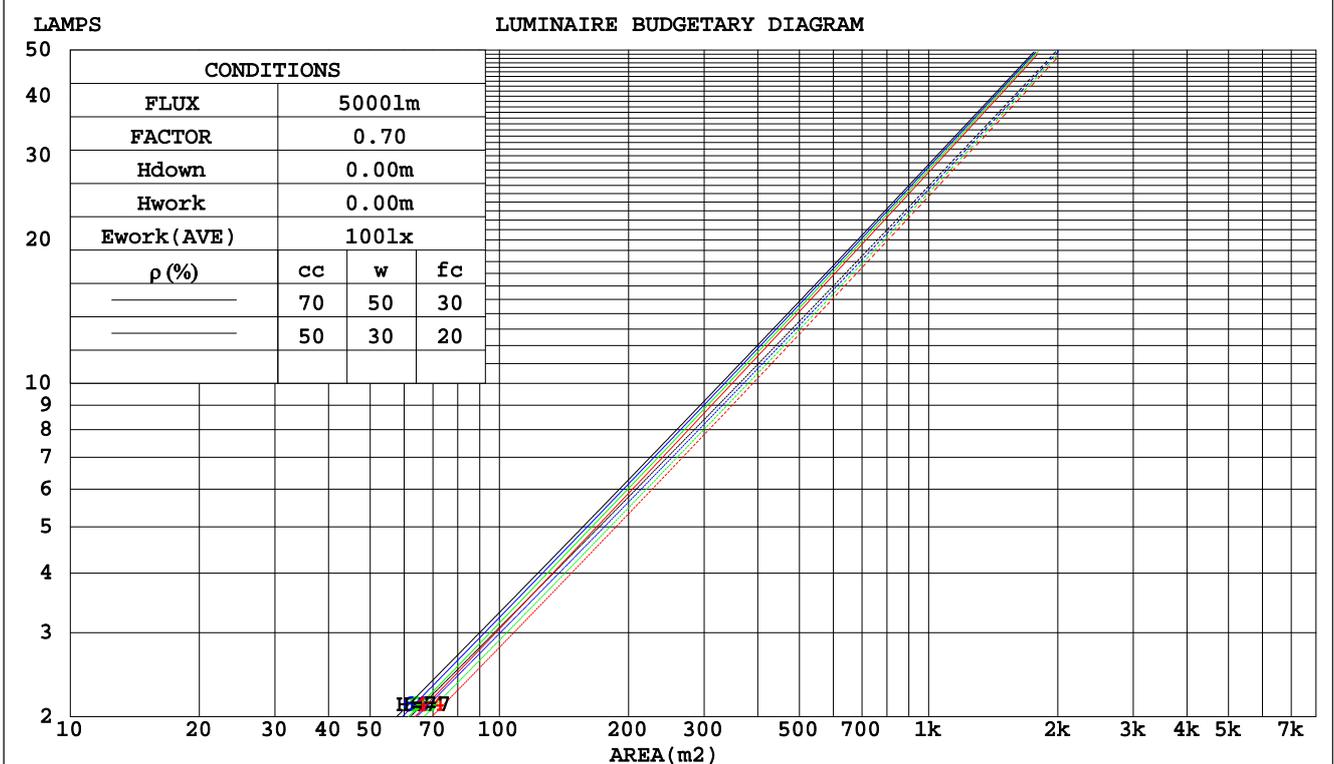

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.129	.073	.023	.122	.069	.022	.108	.062	.020	.095	.055	.018	.084	.049	.016	
2.0	.118	.065	.020	.112	.062	.019	.101	.056	.017	.090	.051	.016	.081	.046	.014	
3.0	.109	.058	.017	.104	.056	.017	.095	.051	.016	.086	.047	.014	.077	.043	.013	
4.0	.102	.053	.016	.097	.051	.015	.089	.047	.014	.081	.044	.013	.074	.040	.012	
5.0	.095	.048	.014	.091	.047	.014	.084	.044	.013	.078	.041	.012	.071	.038	.011	
6.0	.089	.045	.013	.086	.043	.012	.080	.041	.012	.074	.038	.011	.069	.036	.011	
7.0	.084	.041	.012	.081	.040	.012	.076	.038	.011	.071	.036	.011	.066	.034	.010	
8.0	.079	.039	.011	.077	.038	.011	.072	.036	.010	.068	.034	.010	.064	.033	.010	
9.0	.075	.036	.010	.073	.036	.010	.069	.034	.010	.065	.033	.009	.061	.031	.009	
10.0	.072	.034	.010	.070	.034	.009	.066	.032	.009	.063	.031	.009	.059	.030	.009	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.187	.177	.168	.160	.152	.144	.109	.104	.100	.063	.060	.058	.020	.019	.019	
2.0	.168	.152	.138	.144	.131	.119	.099	.090	.083	.057	.053	.049	.018	.017	.016	
3.0	.153	.132	.116	.131	.114	.101	.090	.079	.071	.052	.046	.042	.017	.015	.014	
4.0	.140	.117	.099	.120	.101	.086	.082	.070	.061	.048	.041	.036	.015	.013	.012	
5.0	.129	.104	.087	.110	.090	.075	.076	.063	.053	.044	.037	.032	.014	.012	.010	
6.0	.119	.094	.076	.103	.082	.067	.071	.057	.047	.041	.034	.028	.013	.011	.009	
7.0	.111	.086	.068	.096	.075	.059	.066	.052	.042	.038	.031	.025	.012	.010	.008	
8.0	.104	.079	.062	.090	.069	.054	.062	.048	.038	.036	.028	.023	.012	.009	.008	
9.0	.099	.073	.056	.085	.064	.049	.059	.045	.035	.034	.026	.021	.011	.009	.007	
10.0	.093	.068	.052	.081	.059	.045	.056	.042	.032	.033	.025	.019	.011	.008	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: ADIOSUN Q-MOVIA QM-030					TYPE:3000K CRI95					WEIGHT:1				
SPEC.:19D					DIM.:					SERIAL No.:				
MFR.:					SUR.:78					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions	Viewed crosswise					Viewed endwise								
x = 2H y = 2H	6.0	6.6	6.2	6.7	6.9	6.0	6.6	6.2	6.8	7.0				
3H	6.4	6.9	6.6	7.1	7.3	6.4	6.9	6.6	7.1	7.3				
4H	6.3	6.8	6.6	7.0	7.3	6.3	6.8	6.6	7.0	7.3				
6H	6.2	6.7	6.5	7.0	7.3	6.2	6.7	6.5	7.0	7.3				
8H	6.2	6.7	6.5	6.9	7.2	6.2	6.7	6.5	6.9	7.2				
12H	6.2	6.6	6.5	6.9	7.2	6.2	6.6	6.5	6.9	7.2				
4H 2H	6.3	6.8	6.5	7.0	7.3	6.3	6.8	6.6	7.0	7.3				
3H	6.6	7.0	6.9	7.3	7.6	6.6	7.0	6.9	7.3	7.6				
4H	6.5	6.9	6.9	7.2	7.6	6.5	6.9	6.9	7.2	7.6				
6H	6.4	6.8	6.8	7.2	7.5	6.4	6.8	6.8	7.1	7.5				
8H	6.4	6.7	6.8	7.1	7.5	6.4	6.7	6.8	7.1	7.5				
12H	6.3	6.7	6.8	7.1	7.5	6.3	6.7	6.8	7.1	7.5				
8H 4H	6.4	6.7	6.8	7.1	7.5	6.3	6.7	6.8	7.1	7.5				
6H	6.3	6.6	6.7	7.0	7.4	6.3	6.5	6.7	7.0	7.4				
8H	6.2	6.5	6.7	6.9	7.4	6.2	6.5	6.7	6.9	7.4				
12H	6.2	6.4	6.7	6.9	7.4	6.2	6.4	6.7	6.9	7.4				
12H 4H	6.3	6.6	6.7	7.0	7.5	6.3	6.6	6.7	7.0	7.4				
6H	6.2	6.5	6.7	6.9	7.4	6.2	6.5	6.7	6.9	7.4				
8H	6.2	6.4	6.7	6.9	7.4	6.2	6.4	6.7	6.9	7.4				
Variations with the observer position at spacings:														
S = 1.0H	+ 1.1 / - 1.0					+ 1.1 / - 1.1								
1.5H	+ 1.5 / - 1.2					+ 1.6 / - 1.3								
2.0H	+ 1.0 / - 1.0					+ 0.9 / - 1.0								

CIE Pub.117, 1378 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.1)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	88	83	79	87	82	79	76
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	97	94	90	86
1.25	104	99	95	102	98	95	100	97	94	90
1.50	106	102	99	105	101	98	102	99	97	92
2.00	108	105	101	107	103	101	104	101	99	93
2.50	110	106	104	108	105	103	105	102	100	94
3.00	112	108	106	110	107	104	106	104	102	95
4.00	114	111	109	111	109	107	107	106	104	96
5.00	115	113	111	112	111	109	108	107	106	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

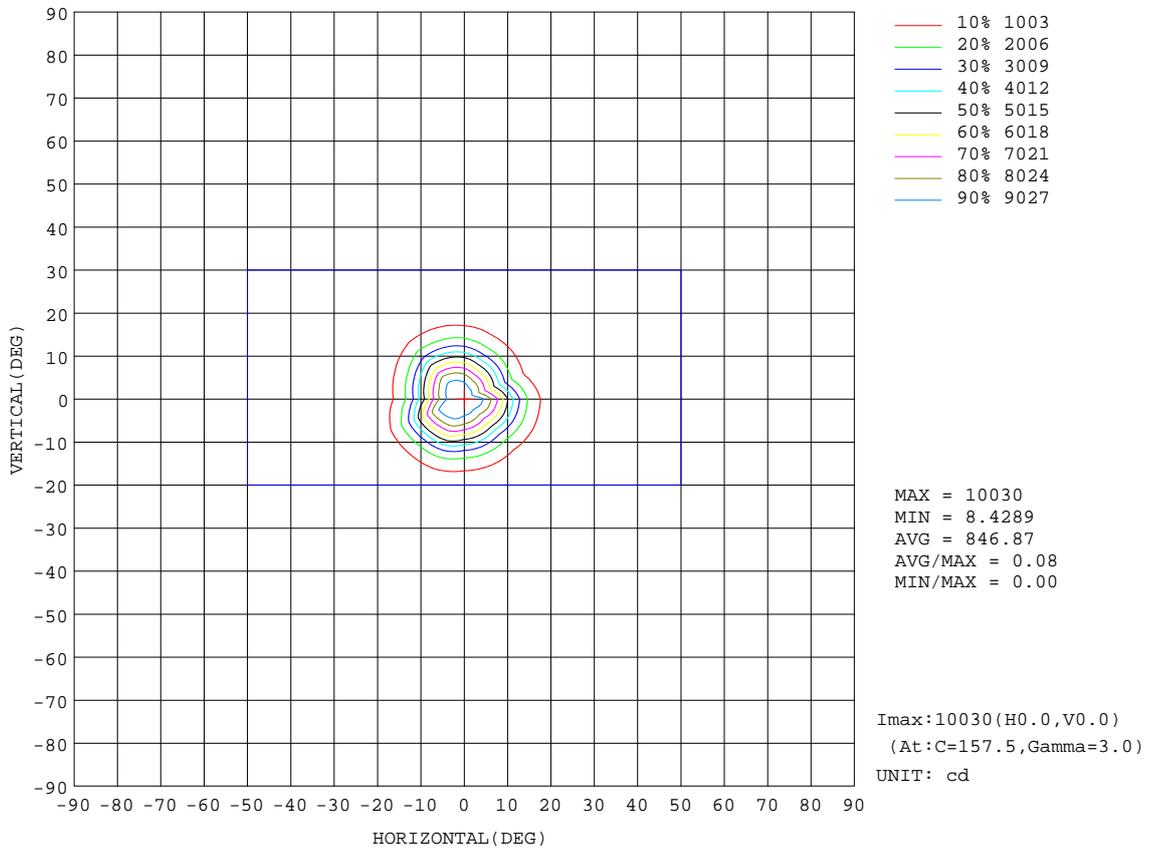


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

AAI Figure

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

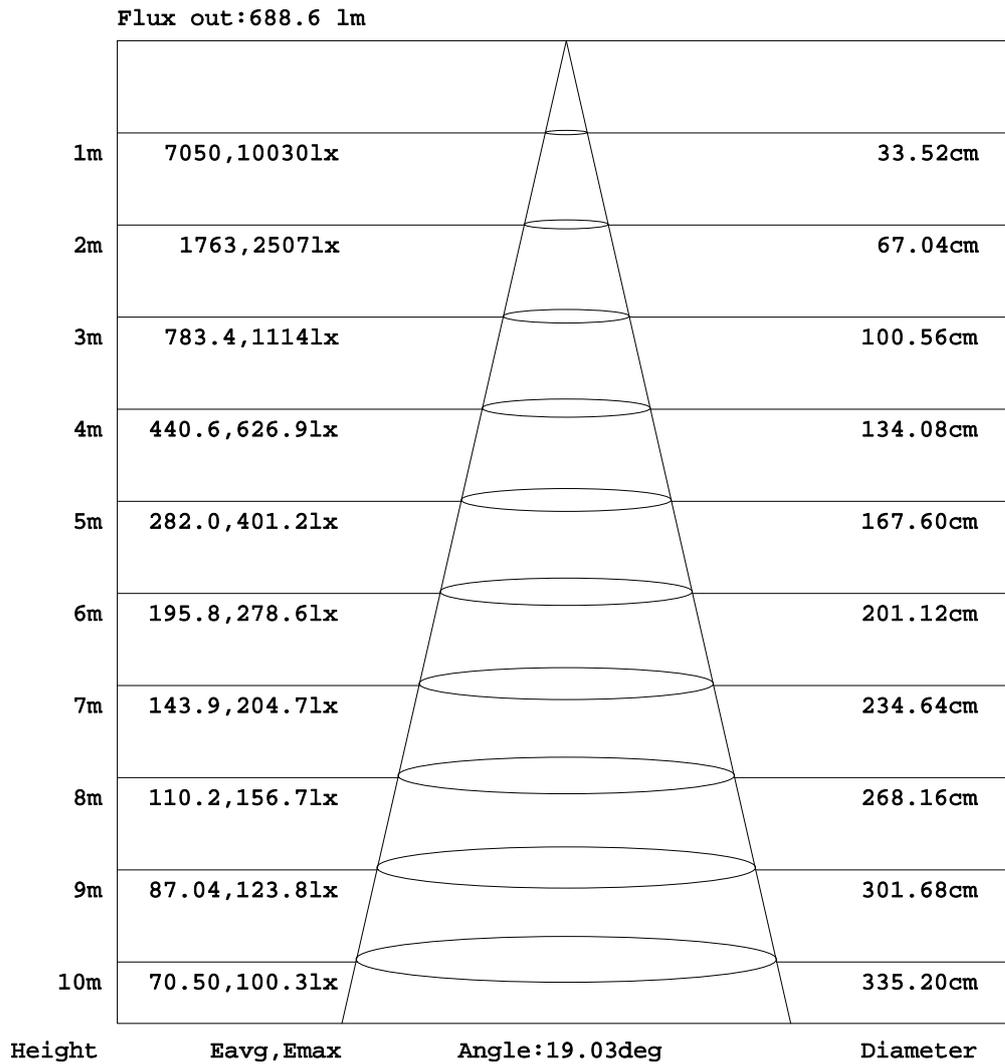


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

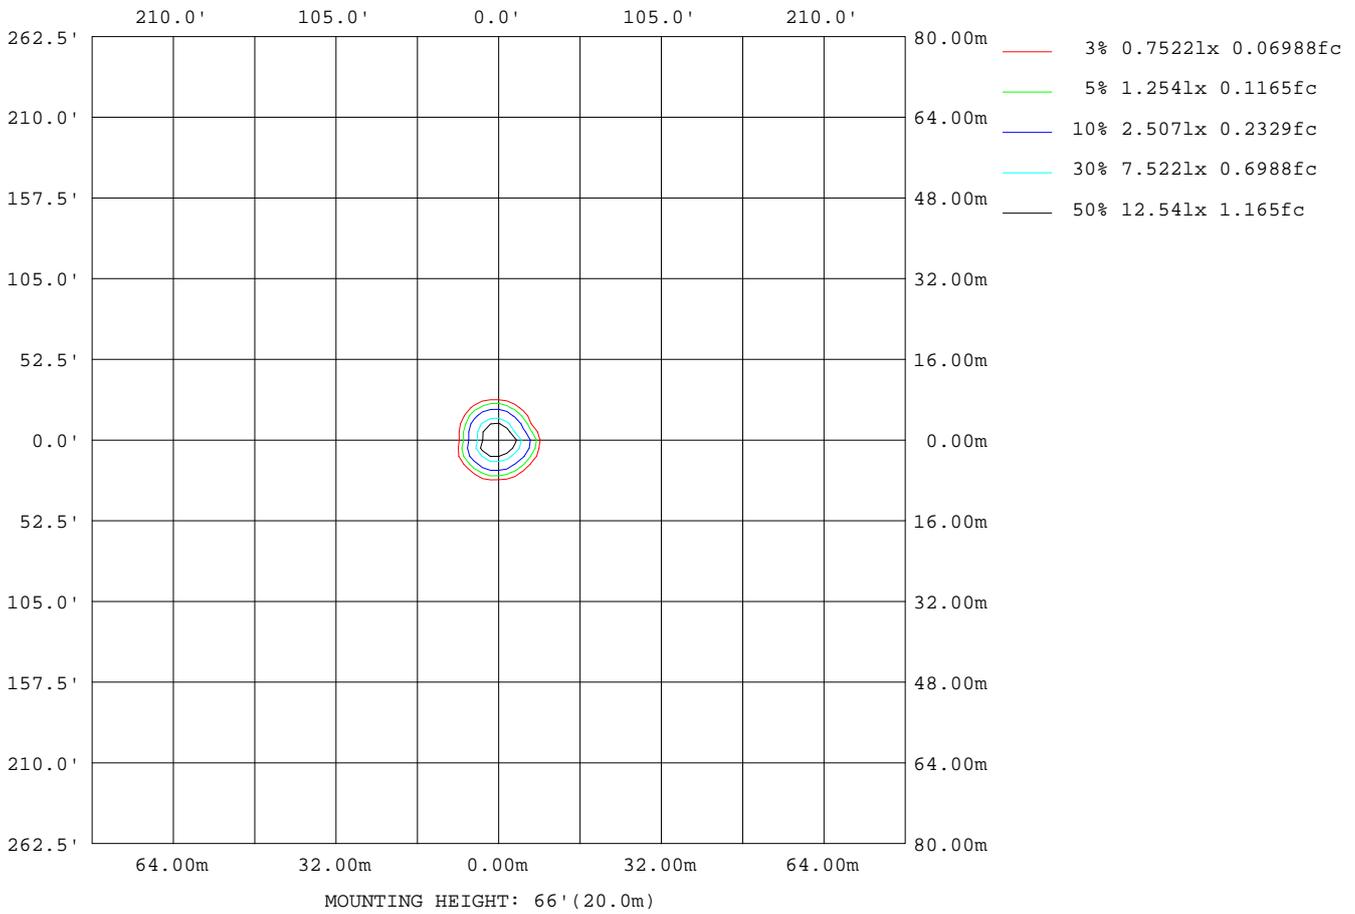

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2782
L_0~180(75)av	361
L_0~180(85)av	635
L_90~270(65)av	3017
L_90~270(75)av	370
L_90~270(85)av	657
L_45(65)av	2690
L_45(75)av	370
L_45(85)av	613

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

Planar Illuminance Curve

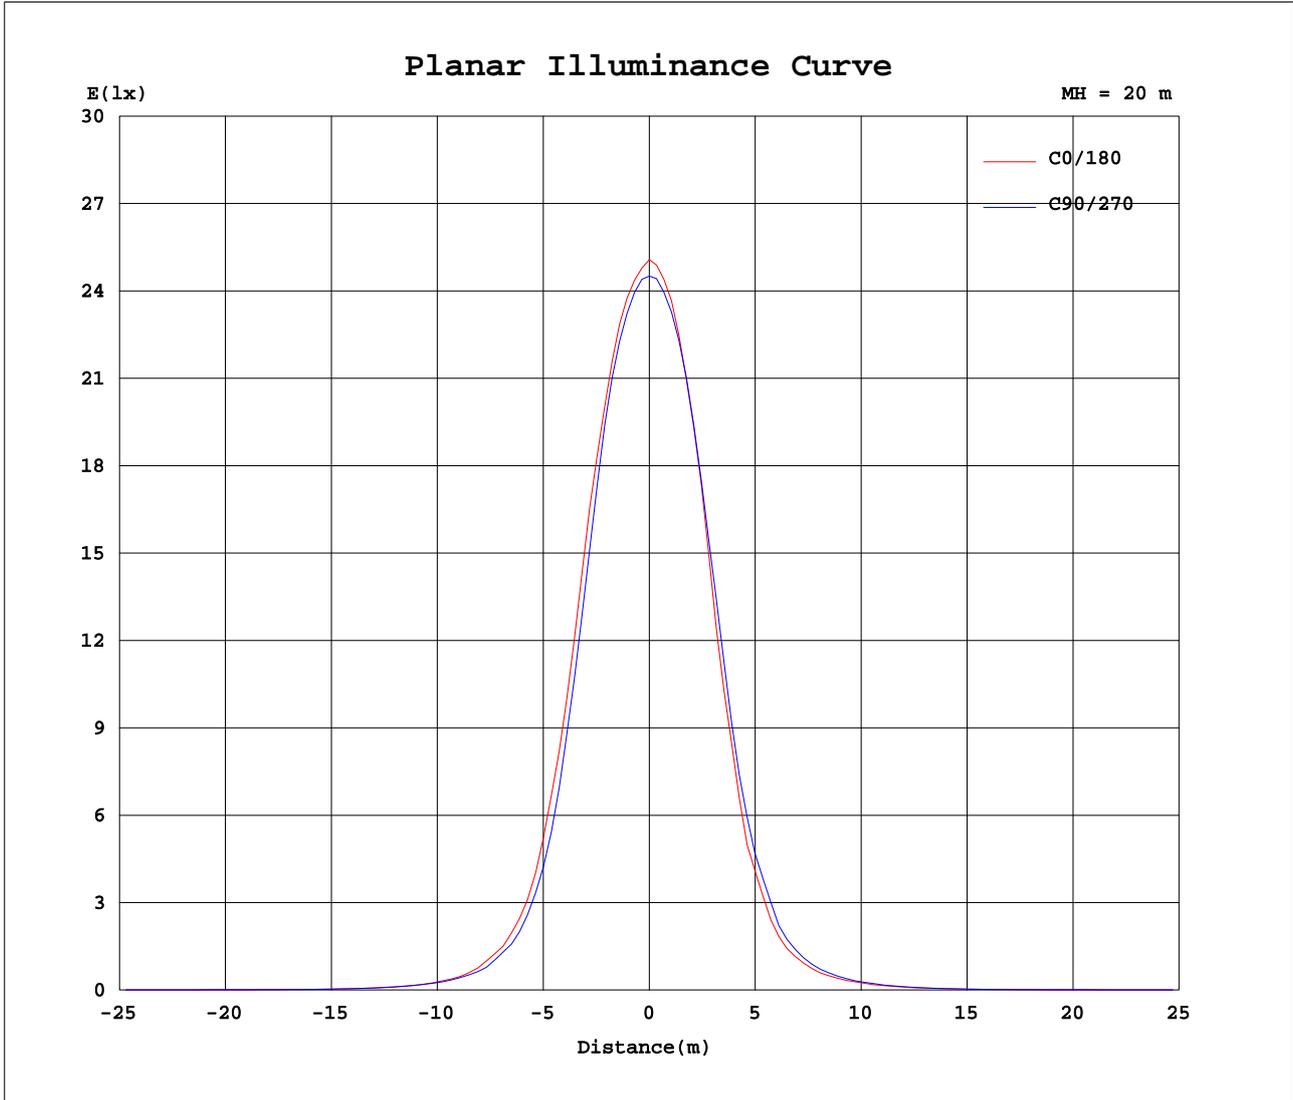

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 28DEG
 Operators: LXJ
 Test Date: 2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 5.190m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: ADIOSUN Q-MOVIA QM-030	TYPE:3000K CRI95	WEIGHT:1
SPEC.:19D	DIM.:	SERIAL No.:
MFR.:	SUR.:78	Shielding Angle:

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	985	985	985	985	985	985	985	985	985	985	985	985	985	985	985	985			
5	858	838	797	823	855	911	940	973	834	870	914	891	856	794	766	728			
10	497	471	403	429	452	545	582	653	423	488	574	526	475	394	360	313			
15	176	175	137	148	150	185	200	233	142	166	215	186	172	130	117	96.7			
20	59.5	53.1	47.4	46.8	50.6	58.6	65.1	70.0	44.3	54.4	69.3	63.5	54.1	44.3	39.4	33.5			
25	20.4	19.3	16.9	18.2	18.9	22.5	23.2	26.1	17.6	20.1	25.2	23.0	21.0	17.5	16.1	13.3			
30	8.50	7.94	7.27	7.76	8.21	9.81	10.06	11.2	7.72	8.54	10.3	9.58	8.88	7.56	6.68	6.02			
35	3.80	3.60	3.32	3.55	3.80	4.54	4.69	5.13	3.62	3.93	4.58	4.24	3.97	3.44	3.07	2.73			
40	1.95	1.89	1.85	1.96	2.07	2.33	2.39	2.59	1.95	2.04	2.27	2.16	2.06	1.87	1.71	1.62			
45	1.37	1.36	1.35	1.40	1.44	1.53	1.53	1.62	1.37	1.40	1.48	1.46	1.44	1.38	1.31	1.29			
50	1.20	1.21	1.21	1.24	1.23	1.27	1.25	1.28	1.19	1.19	1.22	1.22	1.24	1.23	1.18	1.19			
55	1.05	1.06	0.99	1.04	1.04	1.11	1.11	1.15	1.01	1.04	1.10	1.12	1.06	1.02	0.96	0.94			
60	0.76	0.77	0.74	0.77	0.79	0.80	0.83	0.87	0.76	0.80	0.86	0.84	0.81	0.74	0.70	0.67			
65	0.58	0.56	0.49	0.57	0.62	0.63	0.65	0.68	0.54	0.56	0.59	0.58	0.60	0.48	0.44	0.34			
70	0.19	0.17	0.14	0.16	0.19	0.23	0.25	0.30	0.17	0.18	0.21	0.20	0.17	0.13	0.11	0.09			
75	0.05	0.04	0.05	0.05	0.05	0.05	0.06	0.08	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.04			
80	0.04	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02			
85	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02			
90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.03	0.02			
95	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			
100	0.03	0.03	0.03	0.04	0.03	0.04	0.03	0.03	0.04	0.03	0.03	0.03	0.03	0.04	0.03	0.04			
105	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.04	0.04			
110	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			
115	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.05	0.05	0.05	0.05			
120	0.06	0.07	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07			
125	0.11	0.13	0.15	0.14	0.13	0.11	0.10	0.09	0.12	0.11	0.10	0.10	0.11	0.12	0.13	0.15			
130	0.25	0.29	0.35	0.33	0.30	0.25	0.23	0.20	0.28	0.25	0.22	0.23	0.25	0.29	0.31	0.35			
135	0.58	0.64	0.72	0.70	0.65	0.56	0.52	0.47	0.61	0.56	0.50	0.53	0.56	0.64	0.68	0.75			
140	1.06	1.12	1.23	1.20	1.14	1.04	0.98	0.93	1.09	1.02	0.95	0.99	1.04	1.14	1.19	1.27			
145	1.56	1.61	1.70	1.68	1.64	1.56	1.51	1.45	1.59	1.53	1.46	1.50	1.55	1.65	1.69	1.75			
150	1.93	1.96	2.02	2.01	2.00	1.95	1.92	1.90	1.96	1.92	1.88	1.91	1.95	2.01	2.03	2.07			
155	2.13	2.14	2.17	2.18	2.19	2.16	2.15	2.15	2.17	2.14	2.13	2.14	2.16	2.18	2.18	2.20			
160	2.17	2.16	2.15	2.21	2.24	2.24	2.23	2.26	2.23	2.21	2.22	2.23	2.24	2.22	2.16	2.12			
165	1.97	1.94	1.93	2.01	2.08	2.13	2.14	2.19	2.07	2.06	2.10	2.12	2.11	2.01	1.87	1.80			
170	1.55	1.52	1.48	1.58	1.68	1.77	1.80	1.88	1.67	1.70	1.72	1.70	1.66	1.52	1.40	1.36			
175	1.13	1.10	1.08	1.11	1.17	1.27	1.35	1.40	1.19	1.23	1.28	1.22	1.15	1.09	1.03	0.98			
180	0.98	0.97	1.01	0.99	1.00	0.99	1.01	0.99	0.98	0.97	1.01	0.99	1.00	0.99	1.02	0.99			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:LXJ
 Test Date:2024-01-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks: